

Multi-Gang Switch Boxes - 1-5/8" & 2-1/2" Deep




Material: Galvanized Steel

Application: These gang boxes are used when multiple electrical or low voltage devices must be mounted in one location. They can also be used as large capacity junction boxes.

Advantages: Gang boxes save time in installation because there is no need to gang boxes together.

Field Names: Multi-gang box, gang box, multi-gang switch box, multiple device box, extra large junction box, extra long junction box, extra long outlet box.


UL Number: E526989




2 Gang




3 Gang




4 Gang




5 Gang




6 Gang



7 Gang



8 Gang

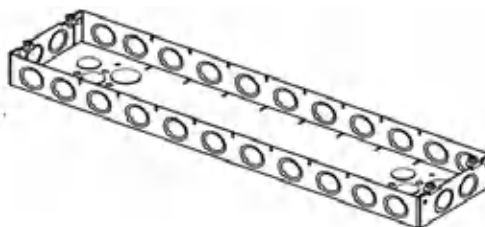

9 Gang

Catalog Number	Description	Depth	Sides	Knockouts Bottom	Cubic Inches	Ship Case	Weight/ Case
ZQGB-1582(951)	2 gang	1-5/8"	(12) - MKO	(4) - 1/2" & (2) - 3/4"	47	5	7
ZQGB-1583(952)	3 gang	1-5/8"	(14) - MKO	(6) - 1/2" & (4) - 3/4"	60	5	7.5
ZQGB-1584(953)	4 gang	1-5/8"	(16) - MKO	(6) - 1/2" & (4) - 3/4"	72.8	5	9
ZQGB-1585(954)	5 gang	1-5/8"	(18) - MKO	(6) - 1/2" & (4) - 3/4"	85.8	5	10
ZQGB-1586(955)	6 gang	1-5/8"	(20) - MKO	(6) - 1/2" & (4) - 3/4"	98.5	1	2
ZQGB-1587(956)	7 gang	1-5/8"	(22) - MKO	(6) - 1/2" & (4) - 3/4"	111.5	1	2.5
ZQGB-1588(957)	8 gang	1-5/8"	(24) - MKO	(6) - 1/2" & (4) - 3/4"	124.5	1	3
ZQGB-1589(958)	9 gang	1-5/8"	(26) - MKO	(6) - 1/2" & (4) - 3/4"	137.3	1	3.5
ZQGB-2122(941)	2 gang	2-1/2"	(12) - MKO	(4) - MKO	70	5	7.5
ZQGB-2123(942)	3 gang	2-1/2"	(14) - MKO	(6) - MKO	90	5	10
ZQGB-2124(943)	4 gang	2-1/2"	(16) - MKO	(6) - MKO	110	5	11
ZQGB-2125(944)	5 gang	2-1/2"	(18) - MKO	(6) - MKO	130	5	13
ZQGB-2126(945)	6 gang	2-1/2"	(20) - MKO	(6) - MKO	150	1	2.4
ZQGB-2127(946)	7 gang	2-1/2"	(22) - MKO	(6) - MKO	169.5	1	3.0
ZQGB-2128(947)	8 gang	2-1/2"	(24) - MKO	(6) - MKO	188.8	1	3.5
ZQGB-2129(948)	9 gang	2-1/2"	(26) - MKO	(6) - MKO	208	1	4.5